

UCG125-12

12V 125AH

Deep Cycle

Ultracell®

Quality in Every Language

UCG125-12

Awaiting Image

Physical Specification





Part Number	UCG125-12
Length	345 ± 2 mm
Width	172 ± 2 mm
Container Height	274 ± 2 mm
Total Height (with terminal)	280 ± 2 mm
Approx Weight	38 kg

Specifications

	Nominal Voltage	12V	
	Nominal Capacity (20HR)	130AH	
Terminal Type	Standard Terminal	F11	
	Optional Terminal	-	
Container Material	Standard Option	ABS	
	Flame Retardant Option (FR)	ABS(UL94:VO)	
Rated Capacity	20hr, 1.80V/cell, 25°C	130.0 AH/6.5A	
	10hr, 1.80V/cell, 25°C	125.0 AH/12.1A	
	5hr, 1.75V/cell, 25°C	104.0 AH/20.8A	
	1hr, 1.60V/cell, 25°C	90.6 AH/30.2A	
Max Discharge Current	1170A (5s)		
Internal Resistance	4.5mΩ		
Discharge Characteristics	Operating Temp. Range	Discharge: -20 ~ 55°C	
		Charge: 0 ~ 40°C	
		Storage: -20 ~ 50°C	
	Nominal Operating Temp. Range	25 ± 3°C	
	Cycle Use	Initial Charging Current less than 32.5A. Voltage 14.4V ~ 15.0V Temp. Coefficient -30mV/°C	
	Standby Use	No limit on Initial Charging Current Voltage 13.5V ~ 13.8V Temp. Coefficient -20mV/°C	
Capacity affect by Temperature	40°C	103%	
	25°C	100%	
	0°C	86%	
Design Floating Life at 20°C	12 Years		
Self Discharge	Ultracell batteries may be stored for up to 6 months at 25°C(77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.		

Dimensions

F11 Terminal




Constant Current Discharge (Amperes) at 20°C

F.V/Time	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	110.0	86.3	65.9	55.1	35.0	26.7	22.1	19.1	16.4	14.6	13.1	12.0	11.3	6.24
1.80V/cell	126.0	96.5	72.6	60.8	37.8	28.6	23.4	20.0	17.3	15.2	13.8	12.6	11.9	6.50
1.75V/cell	141.6	106.1	78.5	65.1	40.1	30.2	24.5	20.8	17.9	15.8	14.2	13.0	12.1	6.63
1.70V/cell	152.5	113.6	83.4	68.9	42.5	31.4	25.3	21.5	18.5	16.3	14.6	13.3	12.4	6.71
1.67V/cell	158.7	118.0	86.3	71.5	43.6	32.4	25.9	21.9	18.8	16.5	14.9	13.5	12.5	6.78
1.60V/cell	172.0	126.4	92.7	75.9	45.4	33.7	26.9	22.6	19.3	16.9	15.1	13.8	12.8	6.88


Constant Power Discharge (Watts) at 20°C

F.V/Time	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	210.5	166.3	127.7	107.3	68.3	52.2	43.4	37.6	32.6	28.9	26.1	23.9	22.6	12.5
1.80V/cell	238.0	184.1	139.8	117.8	73.6	55.7	45.8	39.4	34.1	30.2	27.3	25.1	23.6	13.0
1.75V/cell	264.5	200.7	150.1	125.5	77.8	58.8	47.9	40.8	35.2	31.2	28.1	25.8	24.0	13.2
1.70V/cell	281.8	213.0	158.2	132.0	82.0	61.0	49.3	41.9	36.3	32.1	28.9	26.5	24.6	13.4
1.67V/cell	290.0	219.0	162.7	136.2	83.7	62.7	50.4	42.7	36.8	32.5	29.3	26.7	24.8	13.5
1.60V/cell	310.8	232.2	173.4	143.9	86.7	64.9	52.1	43.9	37.6	33.1	29.7	27.3	25.3	13.6


Discharge Characteristics

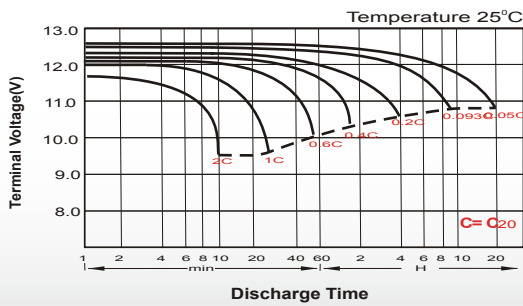


Charging Characteristics

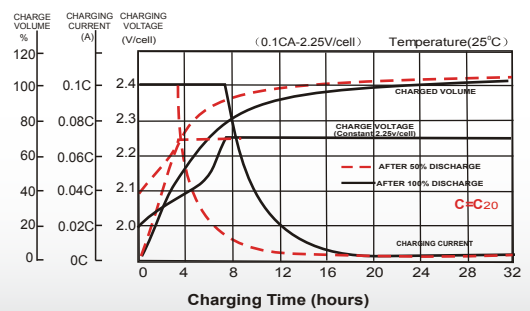


Temperature Effects in Relation to Battery Capacity

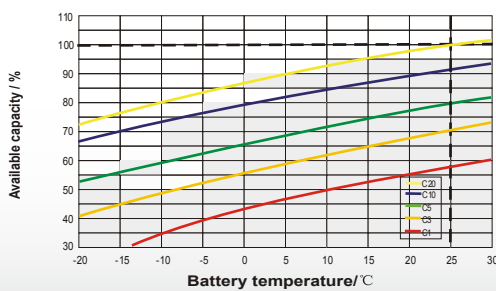

Effect of Temperature on Long Term Float Life

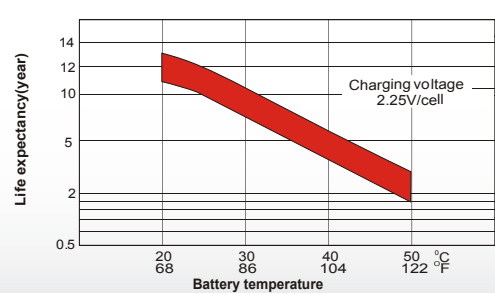

Cycle Life in Relation to Depth of Discharge

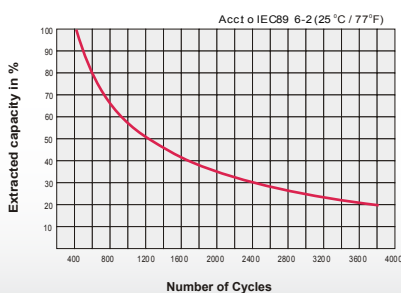

General Relation of Capacity VS. Storage Time

