

# USS105-12

12V 105AH

Stop and Start

# Ultracell®

'Quality in Every Language'

## USS105-12

Awaiting Image


## Physical Specification

|                              |            |
|------------------------------|------------|
| Part Number                  | USS105-12  |
| Length                       | 393 ± 2 mm |
| Width                        | 175 ± 2 mm |
| Container Height             | 190 ± 2 mm |
| Total Height (with terminal) | 190 ± 2 mm |
| Approx Weight                | 29.7 kg    |


## Specifications

|                           |  |                                      |
|---------------------------|--|--------------------------------------|
|                           | Nominal Voltage                        | 12V                                  |
|                           | Nominal Capacity (20HR)                | 105AH                                |
| Terminal Type             | Standard Terminal<br>Optional Terminal | T2<br>-                              |
| Container Material        | Standard Option                        | Black-PP                             |
| Rated Capacity            | 20 Hours                               | 105AH / 5.25A                        |
|                           | Acid                                   | 1.30 ± 0.015g/cm <sup>3</sup> (25°C) |
|                           | Cell Layout                            | B                                    |
|                           | Hold-Down                              | B3/B4                                |
| Cold Cranking Performance | 0°F(-18°C)                             | 950A                                 |
| Design Life               | 6 Years                                |                                      |

## Dimensions (mm)

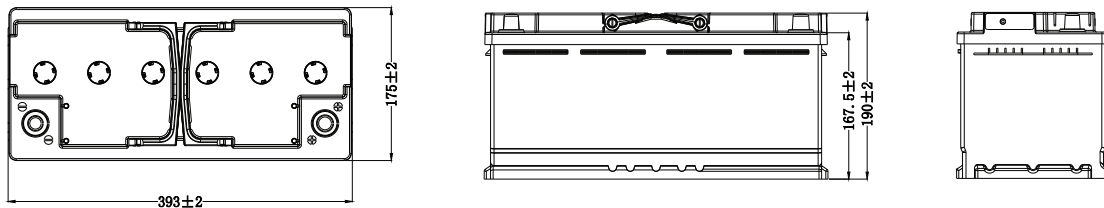

## Discharge Characteristics (25°C)

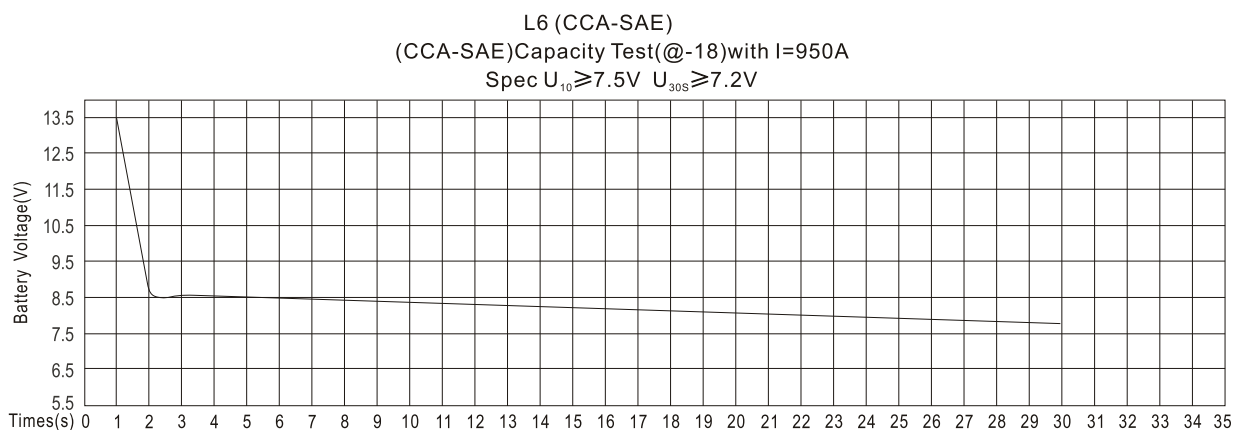

Revised: 13 Nov 2015

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE