UZS250-2

2V 250AH

OPzS

Ultracell®

'Quality in Every Language'

UZS250-2

Physical Specification

Part Number	**UZS250-2**
Length	**124 ± 2 mm**
Width	**206 ± 2 mm**
Container Height	**355 ± 2 mm**
Total Height (with terminal)	**410 ± 2 mm**
Approx Weight without / with Electrolyte	**15.4kg / 20.4kg**

Specifications

	Nominal Voltage	2V
	Nominal Capacity (10HR)	261.0AH
Terminal Type	Standard Terminal	-
	Optional Terminal	-
Container Material	Standard Option	SAN transparent container
Rated Capacity	(100 hr, 1.80V/cell, 20°C)	307.5
	(10 hr, 1.80V/cell, 20°C)	261.0
	(5 hr, 1.75V/cell, 20°C)	240.5
	(3 hr, 1.75V/cell, 20°C)	210.0
Max Discharge Current	2000A (5s)	
Internal Resistance	Approx 0.76mΩ	
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C Charge: 0 ~ 40°C Storage: -15 ~ 40°C
	Type and number of poles	-
	Charging	Floating voltage: 2.23V~2.25V at 20°C Temp. Boost charge: 2.30V~2.40V at 20°C Temp. Charging current(max.): 0.1CA Temp.Coefficient -3mV/°C
	Capacity affected by Temperature	40°C 103% 25°C 100% 0°C 86%
Design Floating Life at 20°C	- Years	
Self Discharge	Ultracell UZS batteries may be stored for up to 6 months at 25°C and then a refresh charge is required. For higher temperatures the time interval will be shorter.	

Dimensions

Terminal

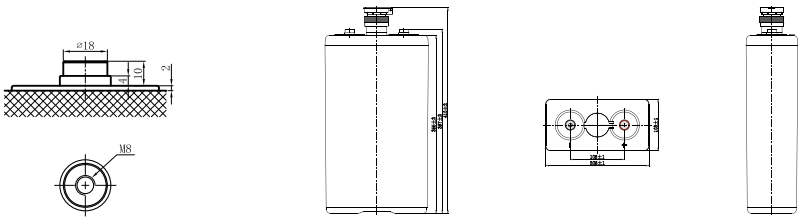

Ultracell (UK) Ltd | Vesty Business Park, Vesty Road, Liverpool, L30 1NY, United Kingdom
Tel: +44 (0) 151 523 2777 | Fax: +44 (0) 151 523 0855 | Email: info@ultracell.co.uk
www.ultracell.co.uk

Revised: 12 Sep 2014

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE

ISO9001

Constant Current Discharge (Amperes) at 20°C

F.V/Time	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V/cell	268.0	209.3	171.0	126.7	101.8	74.7	60.1	50.8	43.6	34.2	28.1	15.3
1.65V/cell	247.5	198.0	162.5	122.2	99.1	73.7	59.1	50.2	43.2	33.8	27.7	15.0
1.70V/cell	228.5	185.3	155.0	118.5	96.1	72.1	58.0	49.4	42.4	33.4	27.2	14.8
1.75V/cell	205.0	172.0	145.8	112.5	92.8	70.0	56.8	48.1	41.6	32.8	26.8	14.7
1.80V/cell	180.8	152.3	133.3	103.3	86.7	65.9	54.5	46.5	40.3	32.2	26.1	14.5
1.85V/cell	144.6	129.8	116.5	93.3	80.0	61.8	51.1	44.0	38.7	31.0	25.3	14.0

Constant Power Discharge (Watts) at 20°C

F.V/Time	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V/cell	457.5	366.3	303.6	227.7	185.0	136.8	111.1	94.5	81.7	64.3	53.1	29.0
1.65V/cell	431.7	350.6	290.9	220.7	181.2	135.6	109.8	93.8	81.2	63.8	52.5	28.6
1.70V/cell	404.0	331.6	279.6	215.5	176.4	133.4	108.1	92.6	80.1	63.4	51.7	28.3
1.75V/cell	368.5	311.0	265.4	206.1	171.5	130.4	106.3	90.7	78.8	62.5	51.2	28.2
1.80V/cell	329.5	279.7	245.8	191.5	161.7	123.6	102.7	88.1	76.8	61.6	50.2	28.0
1.85V/cell	267.9	241.7	218.0	175.3	150.9	117.2	97.3	84.1	74.3	59.7	49.0	27.3

Discharge Characteristics

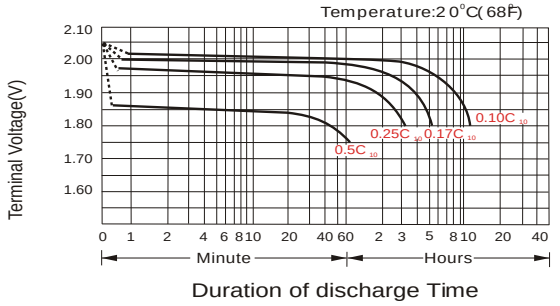

Charge voltage Vs ambient temperature curve

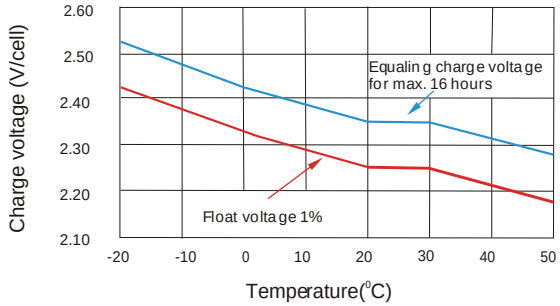

Discharge capacity Vs Ambient temperature curve (I10A)

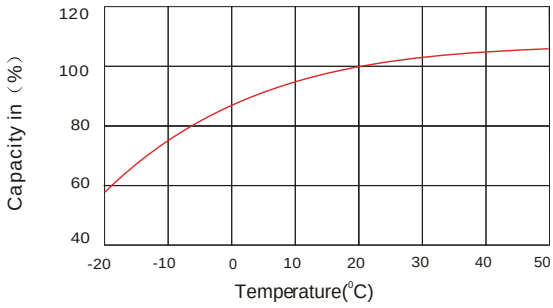

Relation curves of service life and ambient temperature

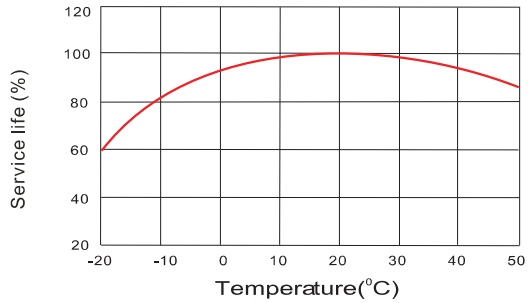

Self Discharge Characteristics

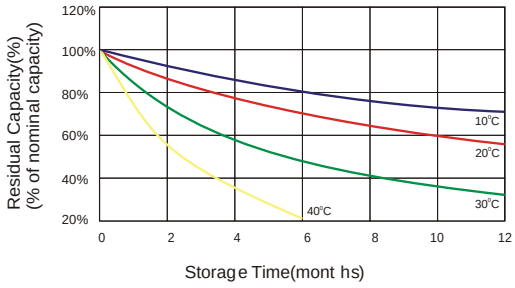

No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required.)

Supplementary charge required before use. Optional charging way: 1.Charged for above 3 days at current 0.1C A and constant volatge 2.25V/cell. 2.Charged for above 20hours at current 0.1C A and constant volatge 2.45V/cell. 3.Charged for 8~10hours at limted current 0.05CA .

Supplementary charge may often fail torecover the capacity. The battery should never be left standing till this is reached.

Ultracell (UK) Ltd | Vesty Business Park, Vesty Road, Liverpool, L30 1NY, United Kingdom
Tel: +44 (0) 151 523 2777 | Fax: +44 (0) 151 523 0855 | Email: info@ultracell.co.uk
www.ultracell.co.uk

Revised: 12 Sep 2014

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE