

UXL135-12



Physical Specification


Part Number:	UXL135-12
Length:	345 ± 3 mm (16.14 inches)
Width:	172 ± 3 mm (6.97 inches)
Container Height:	274 ± 3 mm (8.86 inches)
Total Height (with terminal):	280 ± 3 mm (8.86 inches)
Approx Weight:	Approx 45.5 Kg (82.9lbs)

Specifications

	Nominal Voltage	12V
	Nominal Capacity (10HR)	135AH
Terminal Type	Standard Terminal	F11
	Optional Terminal	-
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	ABS (UL94:VO)
Rated Capacity	149.8 AH/7.49A	(20hr, 1.80V/cell, 25°C / 77°F)
	140.0 AH/14.0A	(10hr, 1.80V/cell, 25°C / 77°F)
	121.8 AH/24.36A	(5hr, 1.75V/cell, 25°C / 77°F)
	109.2 AH/36.4A	(3hr, 1.75V/cell, 25°C / 77°F)
	86.8 AH/86.8A	(1hr, 1.60V/cell, 25°C / 77°F)
Max Discharge Current	1400A (5s)	
Internal Resistance	Approx 4.0mΩ	
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C (5 ~ 122°F)
		Charge: 0 ~ 40°C (32 ~ 104°F)
		Storage: -15 ~ 40°C (5 ~ 104°F)
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
	Cycle Use	Initial Charging Current less than 42.0A. Voltage 14.4V ~ 15.0V at 25°C (77°F) Temp. Coefficient -30mV/°C
	Standby Use	No limit on Initial Charging Current Voltage 13.5V ~ 13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Design Floating Life at 20°C	15 Years	
Self Discharge	Ultracell batteries may be stored for up to 6 months at 25°C(77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.	

Dimensions

F11 Terminal

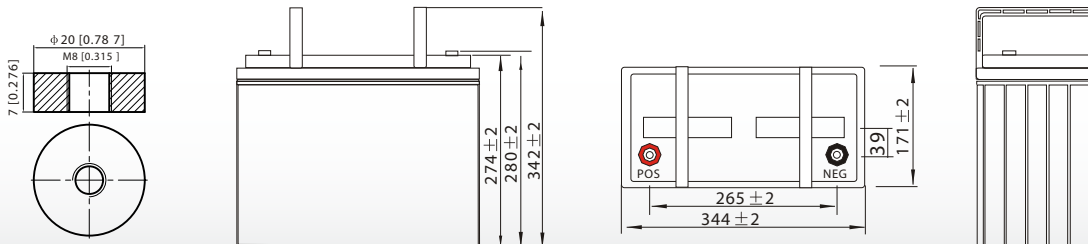


Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	163.8	137.8	122.2	101.4	78.2	66.9	43.3	32.6	26.7	22.5	19.7	15.8	13.6	7.24
1.80V/cell	187.4	154.7	135.1	110.1	84.4	70.6	46.6	35.0	28.4	23.8	20.8	16.6	14.0	7.49
1.75V/cell	212.9	174.4	149.3	119.6	92.0	77.0	48.4	36.4	29.3	24.4	21.5	17.2	14.4	7.68
1.70V/cell	240.4	193.4	164.8	130.6	99.1	81.5	51.0	38.3	30.7	25.8	22.5	17.9	14.9	7.88
1.65V/cell	258.2	207.1	175.4	137.8	104.9	84.3	52.9	39.9	31.9	26.6	23.3	18.5	15.3	8.12
1.60V/cell	284.0	226.8	190.5	147.1	109.0	86.8	54.3	40.9	32.6	27.2	23.8	18.8	15.7	8.25


Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	305.8	259.8	232.8	195.2	151.9	130.4	85.0	64.2	52.7	44.5	39.1	31.5	27.1	14.5
1.80V/cell	345.9	287.9	253.7	208.8	162.6	136.9	90.8	68.5	55.7	46.9	41.2	33.0	27.9	15.0
1.75V/cell	386.6	320.5	277.7	225.1	175.7	148.6	94.1	71.0	57.5	47.9	42.4	34.1	28.7	15.3
1.70V/cell	426.9	350.7	304.2	244.4	188.5	156.7	98.9	74.6	59.9	50.5	44.4	35.5	29.7	15.7
1.65V/cell	454.3	372.6	321.3	255.8	197.7	161.0	101.9	77.3	62.1	51.9	45.8	36.6	30.5	16.2
1.60V/cell	488.5	401.5	345.2	271.1	204.4	164.9	104.0	78.9	63.2	53.0	46.6	37.1	31.1	16.4


Discharge Characteristics

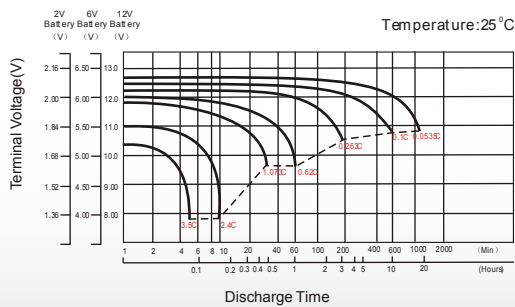


Float Charging Characteristics

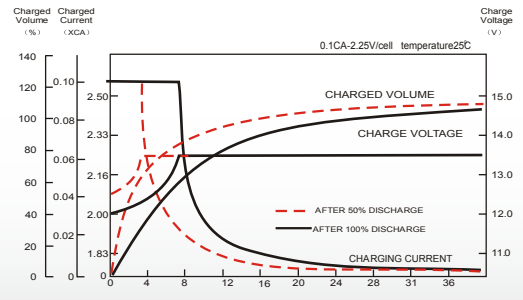


Temperature Effects in Relation to Battery Capacity

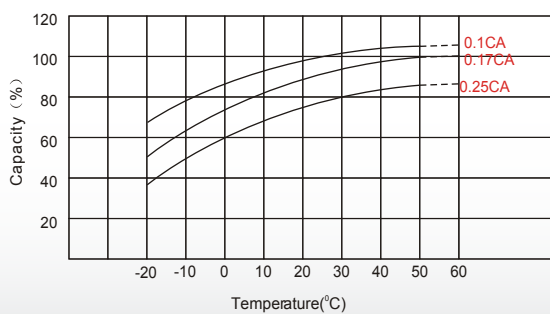

Effect of Temperature on Long Term Float Life

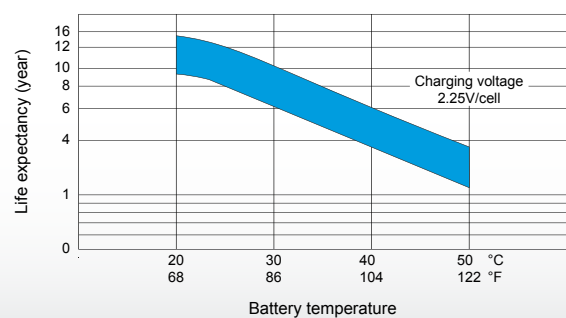

Self Discharge Characteristics

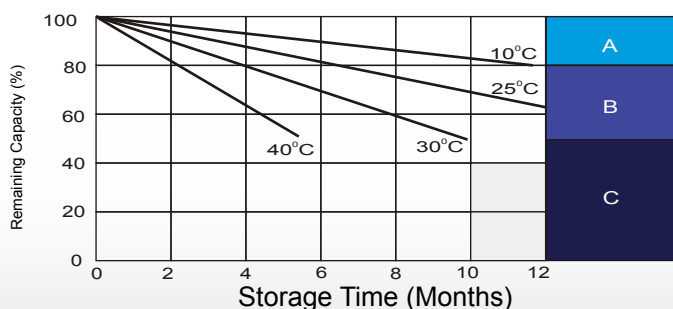

A

No supplementary required
(Carryout supplementary charge before use if 100% capacity is required.)

B

Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.25V/cell.
 3. Charged for 8 ~ 10 hours at limited current 0.05 CA.

C

Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.